J SERIES - I SERIES OFFSET

KIT INCLUDES:
- J SERIES - HANDLE
- I SERIES - HANDLE
- C 701 - MOUNTING CAPS
- CH 03 - CONNECTION HARDWARE
- CH 03b - CONNECTION HARDWARE
- CH 05 - CONNECTION HARDWARE

PRODUCT IMAGE: • J18-I18-OS SHOWN IN BRUSHED STAINLESS [BSS]

C/C HEIGHT \ C/C LENGTH	18"	24"	30"
30"	J30-I18	J30-I24	J30-I30
24"	J24-I18	J24-I24	J24-I30
18"	J18-I18	J18-I24	J18-I30



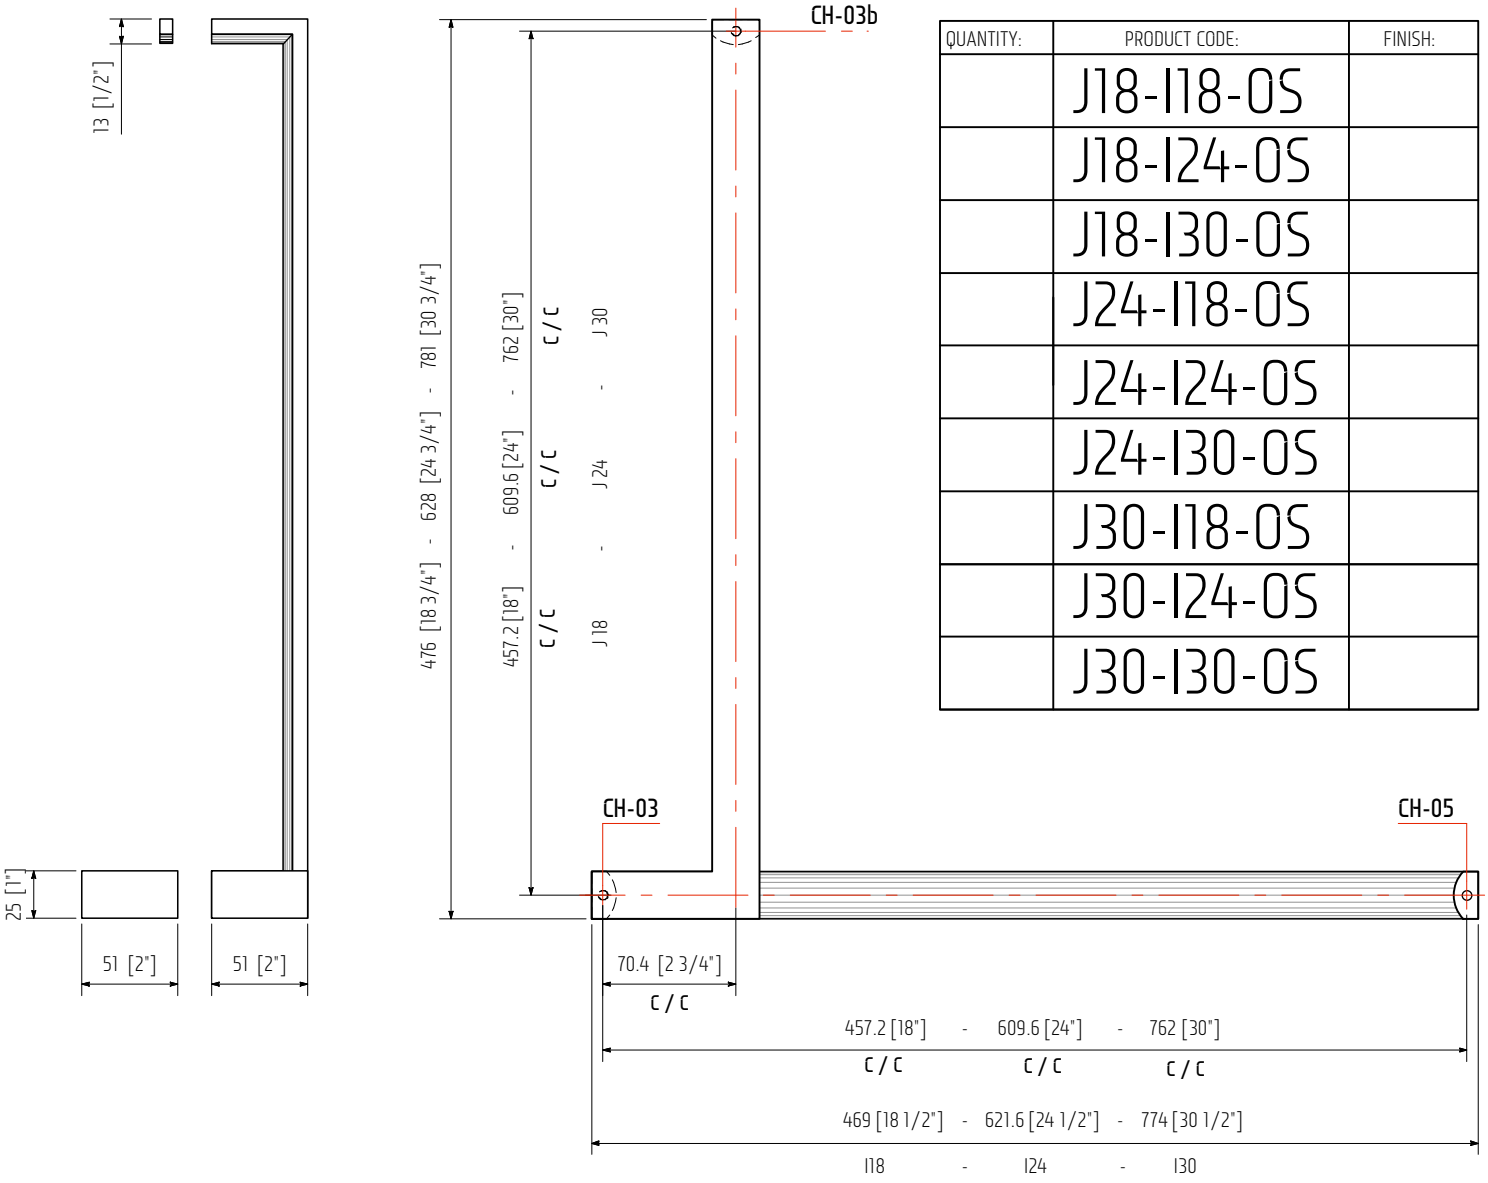

QUANTITY:	PRODUCT CODE:	FINISH:
	J18-I18-OS	
	J18-I24-OS	
	J18-I30-OS	
	J24-I18-OS	
	J24-I24-OS	
	J24-I30-OS	
	J30-I18-OS	
	J30-I24-OS	
	J30-I30-OS	

JWL

Contact: info@jwlhome.com

PULL
LIFE
OPEN

PRODUCT DETAILS:
- Hand crafted from solid 304 stainless steel.
- Curved underside for comfort grip.
- Glass door connection hardware included.
- For more details visit: **www.jwlhome.com**

POLISHED STAINLESS **[PSS]** MATTE BLACK **[BBL]** SATIN BRASS PVD **[SBZ]** SATIN WHITE **[SWH]** BRUSHED STAINLESS **[BSS]**

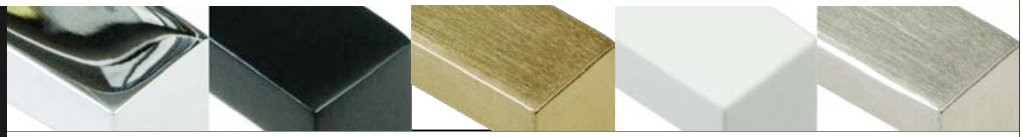

Product sizes can vary ± 0.5%. Dimensions and specifications are subject to change without notice Ⓓ

CH-03

CONNECTION HARDWARE INSTALLATION

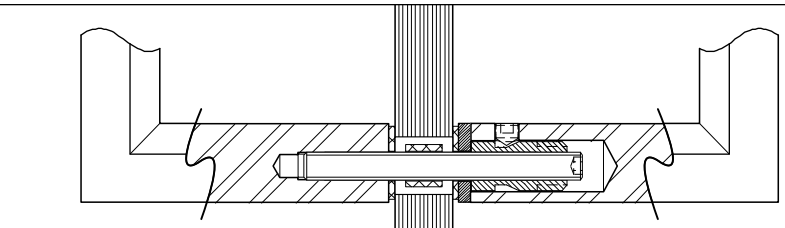

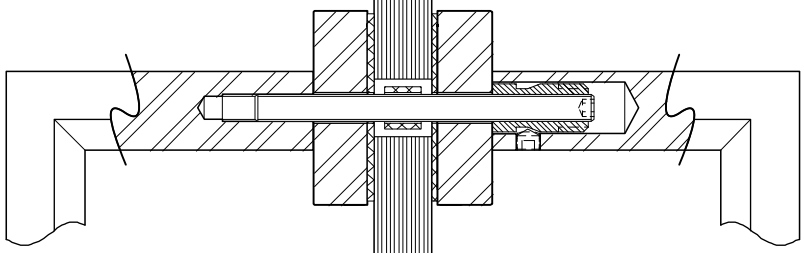

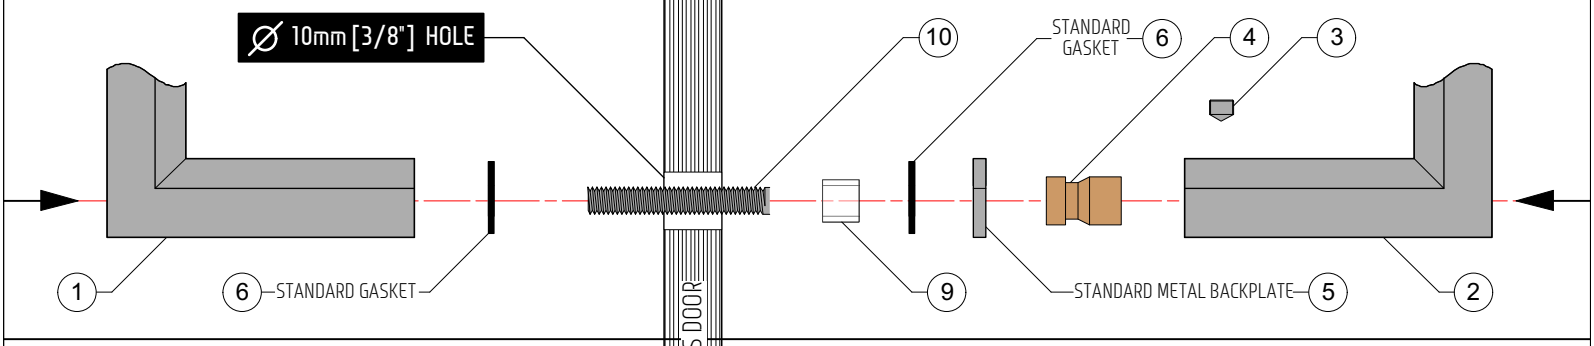

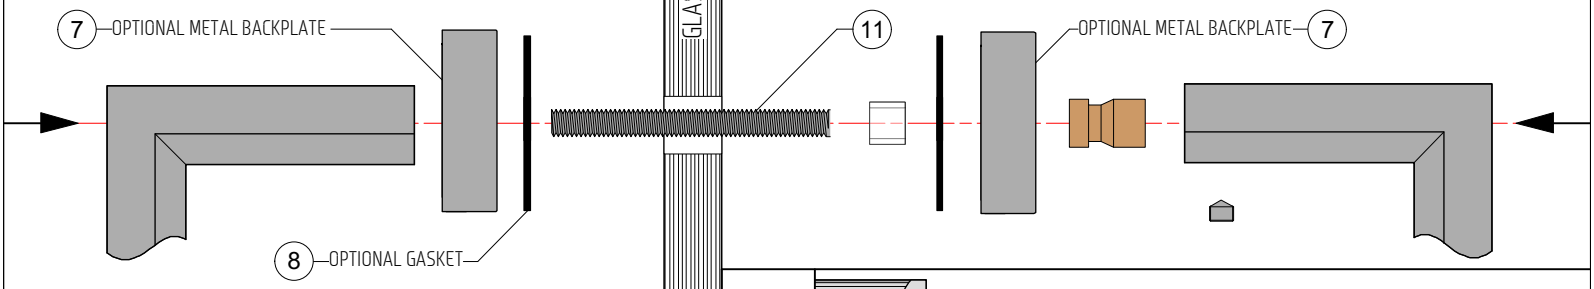

10 FOR 6mm [1/4"] - 10mm [3/8] THICK GLASS WITH STANDARD BACKPLATE



11 FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE 12mm [1/2"] - 19mm [3/4] THICK GLASS



ALLEN KEY TOOL

1		JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES
2		JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES
3		HANDLE SET SCREW - TIGHTNEN WITH ALLEN KEY TOOL - PROVIDED
4		BRASS COLLAR - 7mm or 1/4" WRENCH
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7		OPTIONAL METAL BACKPLATE x 2
8		OPTIONAL BLACK RUBBER GASKET x 2
9		CLEAR PVC INSERT TO COVER THREADED ROD
10		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
11		M5 ROD - 56mm [2 3/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.

JWL
Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

CH-03b

CONNECTION HARDWARE INSTALLATION

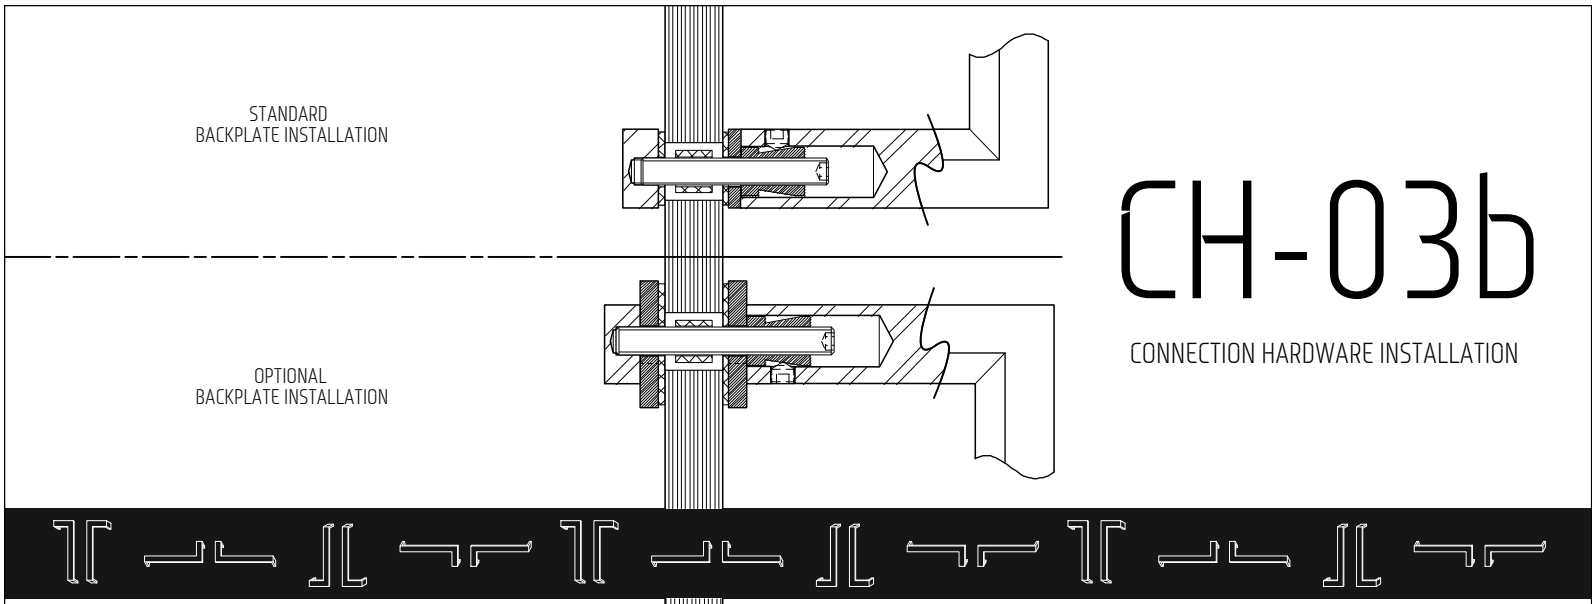

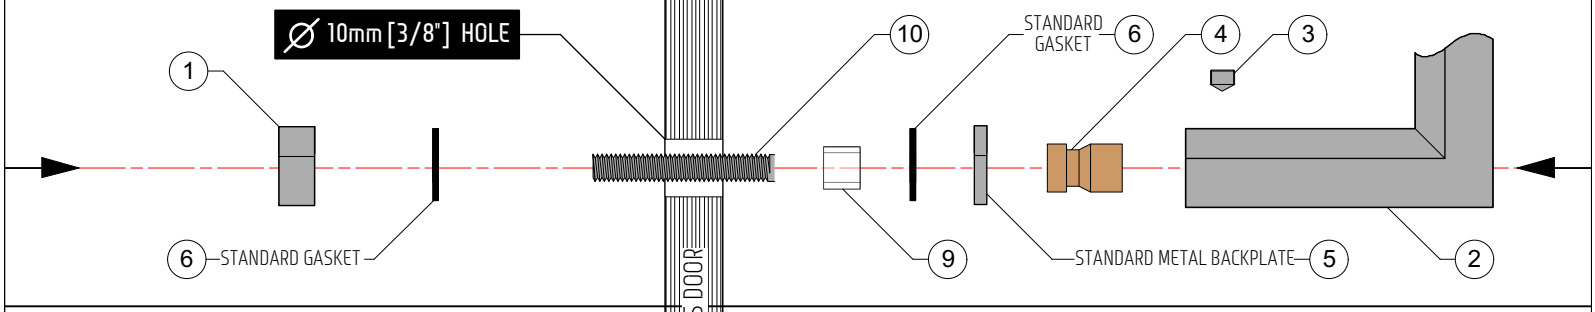

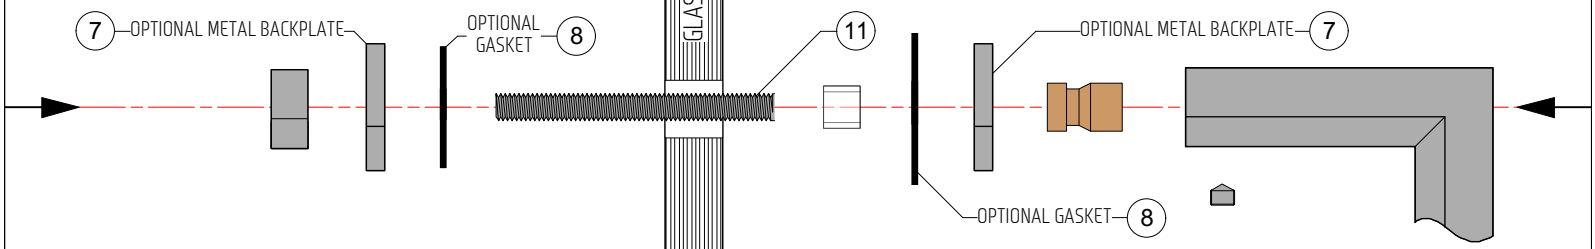

10 FOR 6mm [1/4"] THICK GLASS

11 FOR 10mm [3/8] THICK GLASS
WITH STANDARD BACKPLATE



12 FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE
12mm [1/2"] - 19mm [3/4] THICK GLASS



ALLEN KEY TOOL

1		JWL - 'a' CAP - NO SET SCREW - ALIGN PROFILE WITH HANDLE
2		JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES
3		HANDLE SET SCREW - TIGHTNEN WITH ALLEN KEY TOOL - PROVIDED
4		BRASS COLLAR - 7mm or 1/4" WRENCH - TIGTNEN AT BASE
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7		OPTIONAL METAL BACKPLATE - COLOUR MATCHED TO HANDLE x 2
8		OPTIONAL BLACK RUBBER GASKET x 2
9		CLEAR PVC INSERT TO COVER THREADED ROD
10		M5 ROD - 31mm [1 1/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
11		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
12		M5 ROD - 46mm [1 3/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 12mm [1/2"] DIA.

JWL
Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

CH-05

CONNECTION HARDWARE INSTALLATION

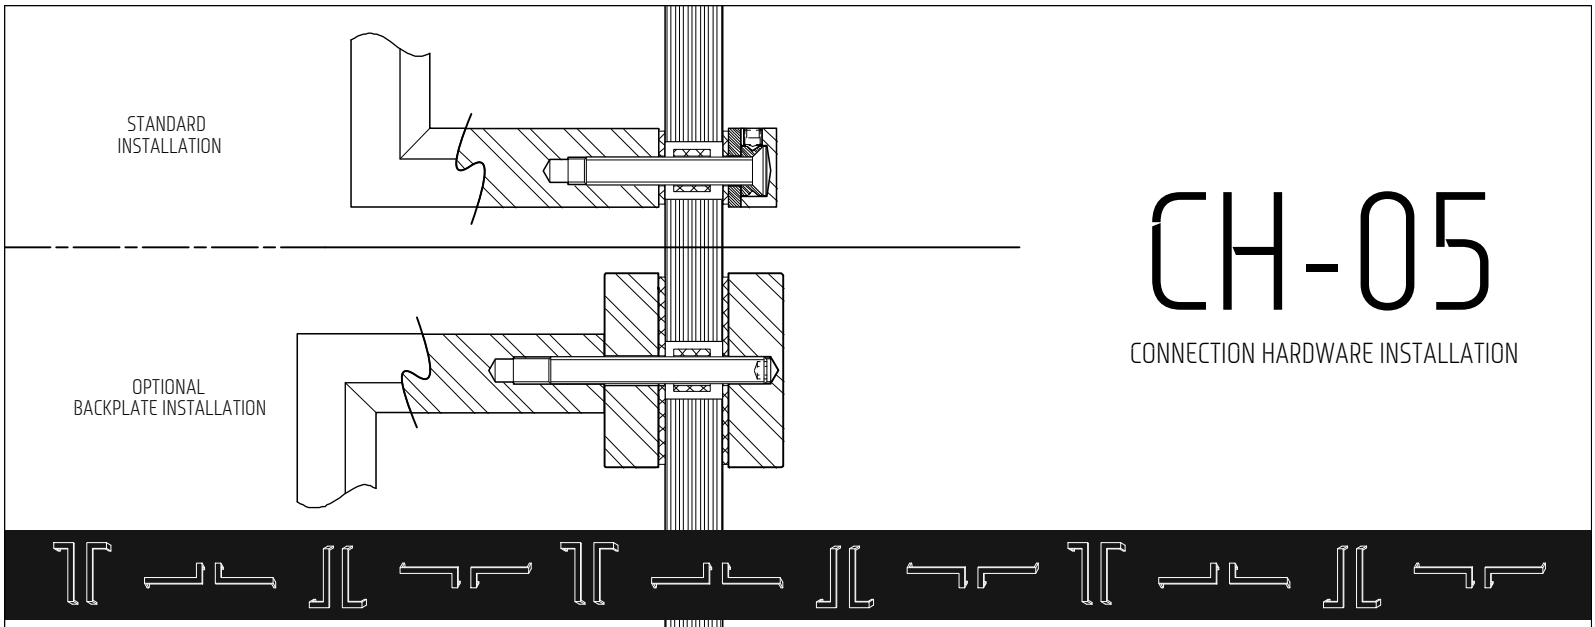

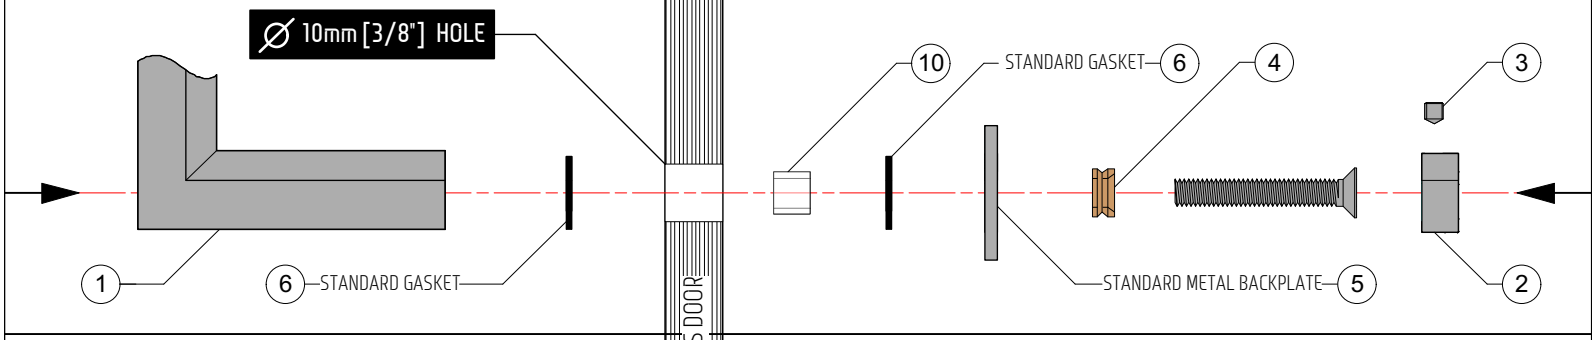

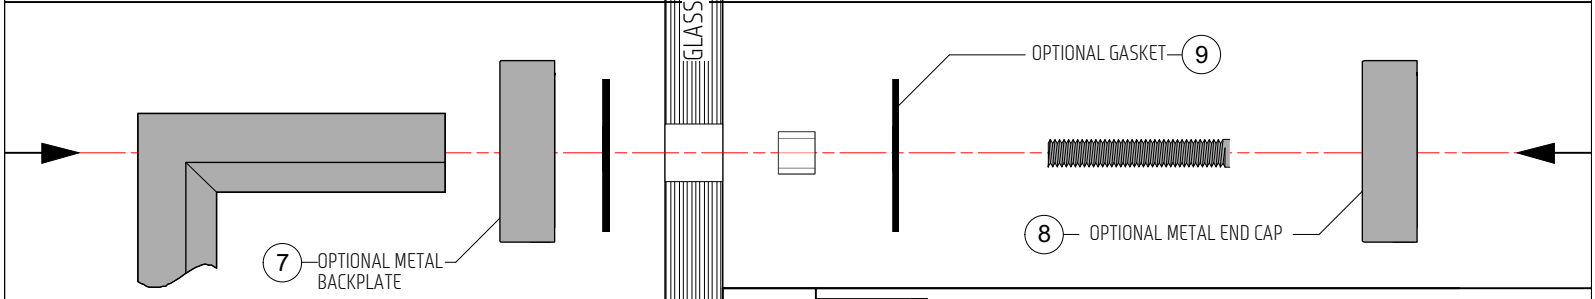

11 FOR 6mm [1/4"] - 10mm [3/8] THICK GLASS WITH STANDARD BACKPLATE



12 FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE
12mm [1/2"] - 19mm [3/4] THICK GLASS



ALLEN KEY TOOL



1		JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES
2		JWL - C 701 'b' CAP - WITH SET SCREW
3		SET SCREW - COLOUR MATCHED TO 'b' CAP
4		BRASS COLLAR - ALIGN COUNTER SUNK SIDE WITH SCREW HEAD
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7 & 8		OPTIONAL METAL BACKPLATE & OPTIONAL END CAP - HAND SCREW TO TIGTHEN
9		OPTIONAL BLACK RUBBER GASKET x 2
10		CLEAR PVC INSERT TO COVER THREADED SCREW
11		M5 SCREW - 29mm [1 5/32"] - TIGHTEN WITH PHILIPS SCREWDRIVER
12		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.

JWL
Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com