



L SERIES - I SERIES OFFSET


- KIT INCLUDES:
- L SERIES - HANDLE
 - I SERIES - HANDLE
 - C 701 - MOUNTING CAPS
 - CH 03 - CONNECTION HARDWARE
 - CH 03b - CONNECTION HARDWARE
 - CH 05 - CONNECTION HARDWARE

PRODUCT IMAGE: • L18-I18-OS SHOWN IN BRUSHED STAINLESS [BSS]

C / C H E I G H T	30"	L30-I18	L30-I24	L30-I30
	24"	L24-I18	L24-I24	L24-I30
	18"	L18-I18	L18-I24	L18-I30
		18"	24"	30"
C / C LENGTH				



QUANTITY:	PRODUCT CODE:	FINISH:
	L18-I18-OS	
	L18-I24-OS	
	L18-I30-OS	
	L24-I18-OS	
	L24-I24-OS	
	L24-I30-OS	
	L30-I18-OS	
	L30-I24-OS	
	L30-I30-OS	

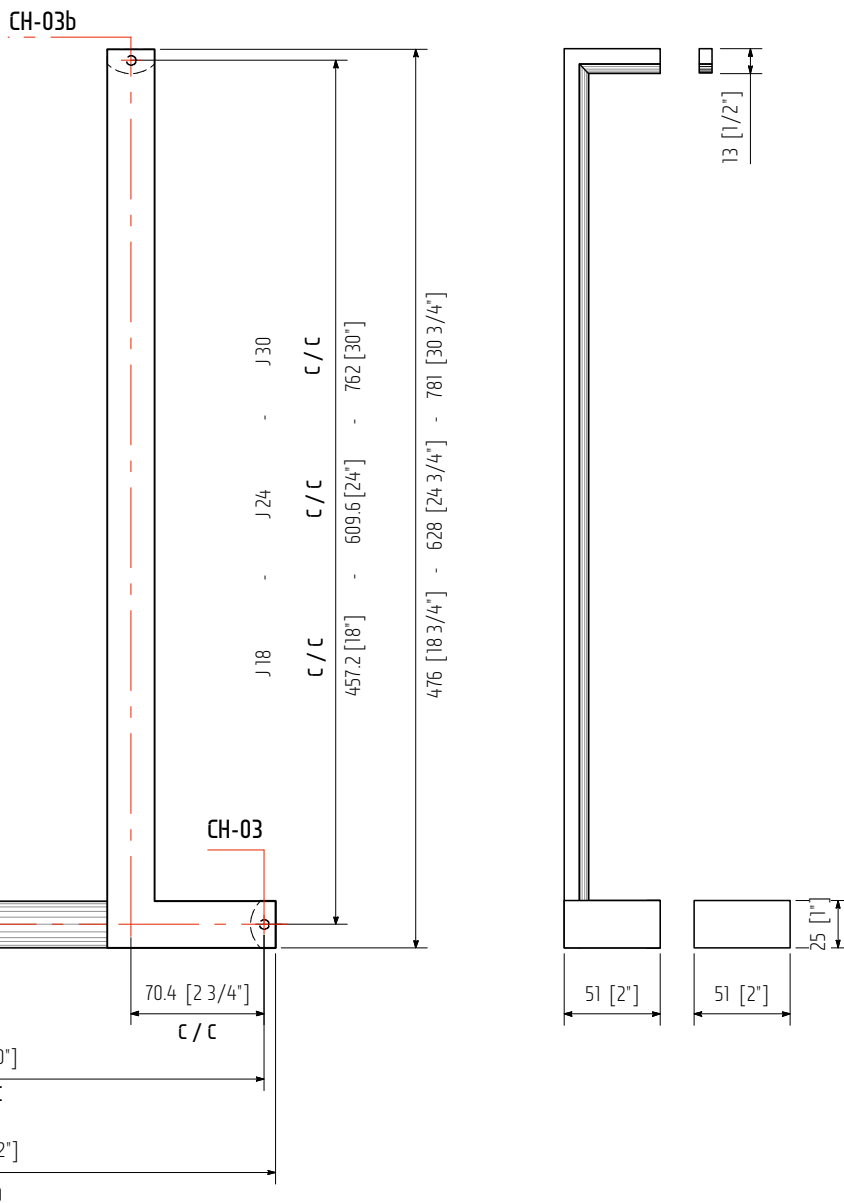

JWL

Contact: info@jwlhome.com

PRODUCT DETAILS:

- Hand crafted from solid 304 stainless steel.
- Curved underside for comfort grip.
- Glass door connection hardware included.
- For more details visit: www.jwlhome.com



POLISHED STAINLESS [PSS]

MATTE BLACK [BBL]

SATIN BRASS PVD [SBZ]

SATIN WHITE [SWH]

BRUSHED STAINLESS [BSS]



Product sizes can vary $\pm 0.5\%$. Dimensions and specifications are subject to change without notice

STANDARD
INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-03

CONNECTION HARDWARE INSTALLATION



Ø 10mm [3/8"] HOLE

GLASS DOOR

1 6—STANDARD GASKET 10 9 STANDARD GASKET 6 4 3 5 2

7—OPTIONAL METAL BACKPLATE 8—OPTIONAL GASKET 11 7—OPTIONAL METAL BACKPLATE

10 FOR 6mm [1/4"] - 10mm [3/8"] THICK GLASS WITH STANDARD BACKPLATE

THREADED ROD 36mm [1 7/16"]

11 FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE 12mm [1/2"] - 19mm [3/4"] THICK GLASS

THREADED ROD 56mm [2 3/16"]

ALLEN KEY TOOL

1 JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES

2 JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES

3 HANDLE SET SCREW - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

4 BRASS COLLAR - 7mm or 1/4" WRENCH

5 STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE

6 STANDARD BLACK RUBBER GASKET x 2

7 OPTIONAL METAL BACKPLATE x 2

8 OPTIONAL BLACK RUBBER GASKET x 2

9 CLEAR PVC INSERT TO COVER THREADED ROD

10 M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

11 M5 ROD - 56mm [2 3/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

Contact: info@jwlhome.com

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com




NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.

STANDARD
BACKPLATE INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-03b

CONNECTION HARDWARE INSTALLATION

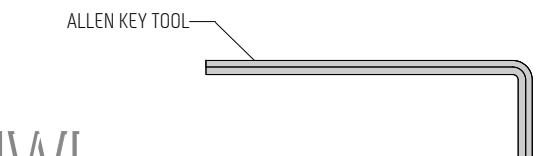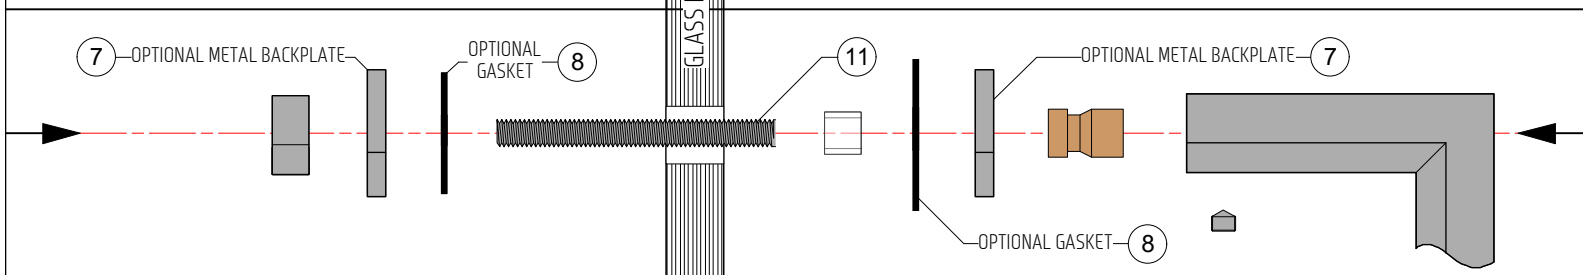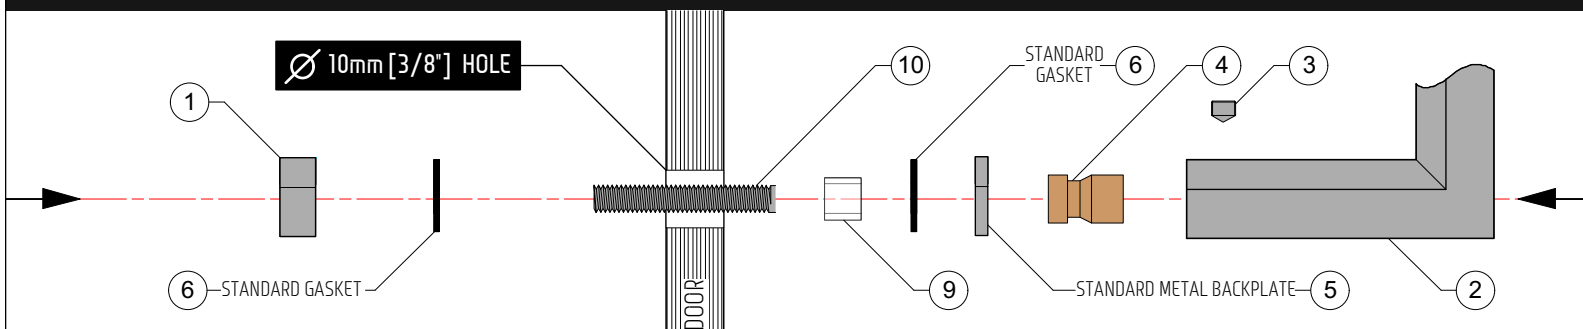

1		JWL - 'a' CAP - NO SET SCREW - ALIGN PROFILE WITH HANDLE
2		JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES
3		HANDLE SET SCREW - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
4		BRASS COLLAR - 7mm or 1/4" WRENCH - TIGHTEN AT BASE
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7		OPTIONAL METAL BACKPLATE - COLOUR MATCHED TO HANDLE x 2
8		OPTIONAL BLACK RUBBER GASKET x 2
9		CLEAR PVC INSERT TO COVER THREADED ROD
10		M5 ROD - 31mm [1 1/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
11		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
12		M5 ROD - 46mm [1 3/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 12mm [1/2"] DIA.

STANDARD
INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-05

CONNECTION HARDWARE INSTALLATION



Ø 10mm [3/8"] HOLE

1

6—STANDARD GASKET

GLASS DOOR

10

STANDARD GASKET—6

4

3

2

—STANDARD METAL BACKPLATE—5

7—OPTIONAL METAL
BACKPLATE

OPTIONAL GASKET—9

8—OPTIONAL METAL END CAP

11—FOR 6mm [1/4"] - 10mm [3/8"] THICK
GLASS WITH STANDARD BACKPLATE

M5 SCREW 30mm [1 3/16"]

12—FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE
12mm [1/2"] - 19mm [3/4"] THICK GLASS

THREADED ROD 36mm [1 7/16"]

ALLEN KEY TOOL

1



JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES

2



JWL - C 701 'b' CAP - WITH SET SCREW

3



SET SCREW - COLOUR MATCHED TO 'b' CAP

4



BRASS COLLAR - ALIGN COUNTER SUNK SIDE WITH SCREW HEAD

5




STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE

6



STANDARD BLACK RUBBER GASKET x 2

7 & 8



OPTIONAL METAL BACKPLATE & OPTIONAL END CAP - HAND SCREW TO TIGHTEN

9



OPTIONAL BLACK RUBBER GASKET x 2

10



CLEAR PVC INSERT TO COVER THREADED SCREW

11



M5 SCREW - 29mm [1 5/32"] - TIGHTEN WITH PHILIPS SCREWDRIVER

12



M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

PULL
LIFE
OPEN

Contact: info@jwlhome.com

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.