



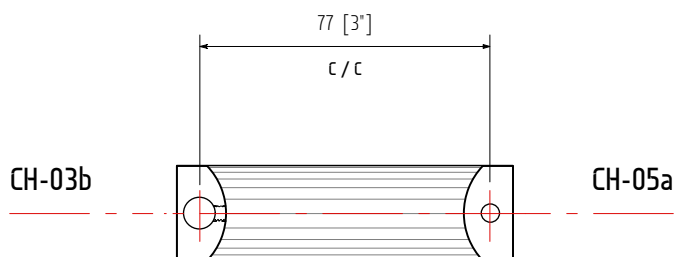

U-SS

KIT INCLUDES: • U - HANDLE
• CH 03b - CONNECTION HARDWARE
• CH 05a- CONNECTION HARDWARE

PRODUCT IMAGE: U-SS IN BRUSHED STAINLESS STEEL FINISH [BSS]

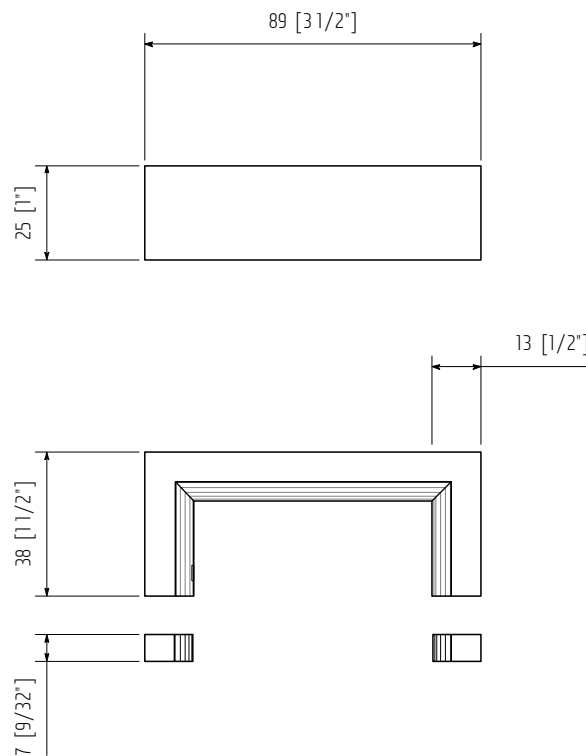

Contact: info@jwlhome.com

PULL
LIFE
OPEN

PRODUCT DETAILS:
• Hand crafted from solid 304 stainless steel.
• Curved underside for comfort grip.
• Glass door connection hardware included.
• For more details visit: www.jwlhome.com




POLISHED STAINLESS [PSS]

MATTE BLACK [BBL]

SATIN BRASS PVD [SBZ]

SATIN WHITE [SWH]

BRUSHED STAINLESS [BSS]






Product sizes can vary $\pm 0.5\%$. Dimensions and specifications are subject to change without notice

STANDARD
BACKPLATE INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-03b

CONNECTION HARDWARE INSTALLATION

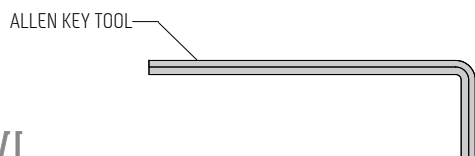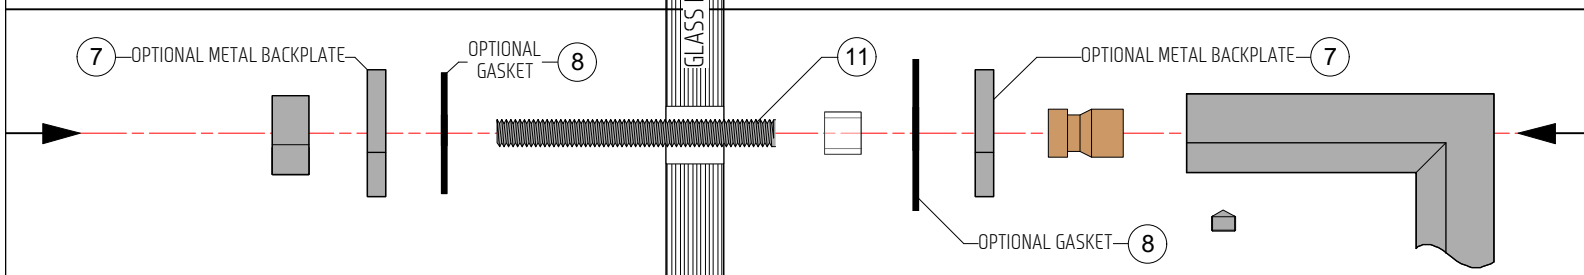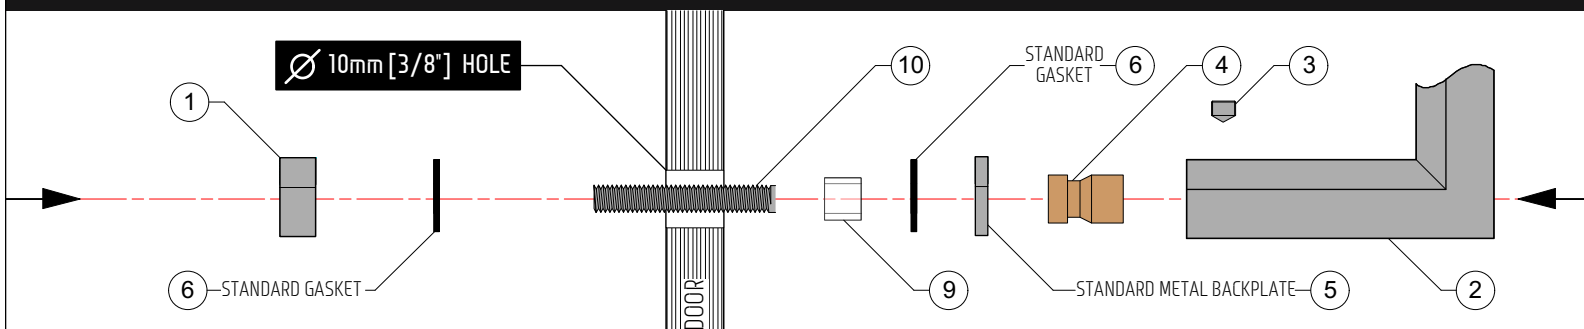

1		JWL - 'a' CAP - NO SET SCREW - ALIGN PROFILE WITH HANDLE
2		JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES
3		HANDLE SET SCREW - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
4		BRASS COLLAR - 7mm or 1/4" WRENCH - TIGHTEN AT BASE
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7		OPTIONAL METAL BACKPLATE - COLOUR MATCHED TO HANDLE x 2
8		OPTIONAL BLACK RUBBER GASKET x 2
9		CLEAR PVC INSERT TO COVER THREADED ROD
10		M5 ROD - 31mm [1 1/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
11		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
12		M5 ROD - 46mm [1 3/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 12mm [1/2"] DIA.

STANDARD
BACKPLATE INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-05a

CONNECTION HARDWARE INSTALLATION



Ø 10mm [3/8"] HOLE

6—STANDARD GASKET

1 5—STANDARD METAL BACKPLATE

10

STANDARD GASKET—6

4

3

STANDARD METAL BACKPLATE—5

2

GLASS DOOR

7—OPTIONAL METAL BACKPLATE

OPTIONAL GASKET—9

8—OPTIONAL METAL END CAP

11—FOR 6mm [1/4"] - 10mm [3/8"] THICK GLASS WITH STANDARD BACKPLATE

M5 SCREW 30mm [1 3/16"]

12—FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE
12mm [1/2"] - 19mm [3/4"] THICK GLASS

THREADED ROD 36mm [1 7/16"]

ALLEN KEY TOOL

1		JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES
2		JWL - C 701 'b' CAP - WITH SET SCREW
3		SET SCREW - COLOUR MATCHED TO 'b' CAP
4		BRASS COLLAR - ALIGN COUNTER SUNK SIDE WITH SCREW HEAD
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7 & 8		OPTIONAL METAL BACKPLATE & OPTIONAL END CAP - HAND SCREW TO TIGHTEN
9		OPTIONAL BLACK RUBBER GASKET x 2
10		CLEAR PVC INSERT TO COVER THREADED SCREW
11		M5 SCREW - 30mm [1 3/16"] - TIGHTEN WITH PHILIPS SCREWDRIVER
12		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL
PULL
LIFE
OPEN

Contact: info@jwlhome.com

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.