



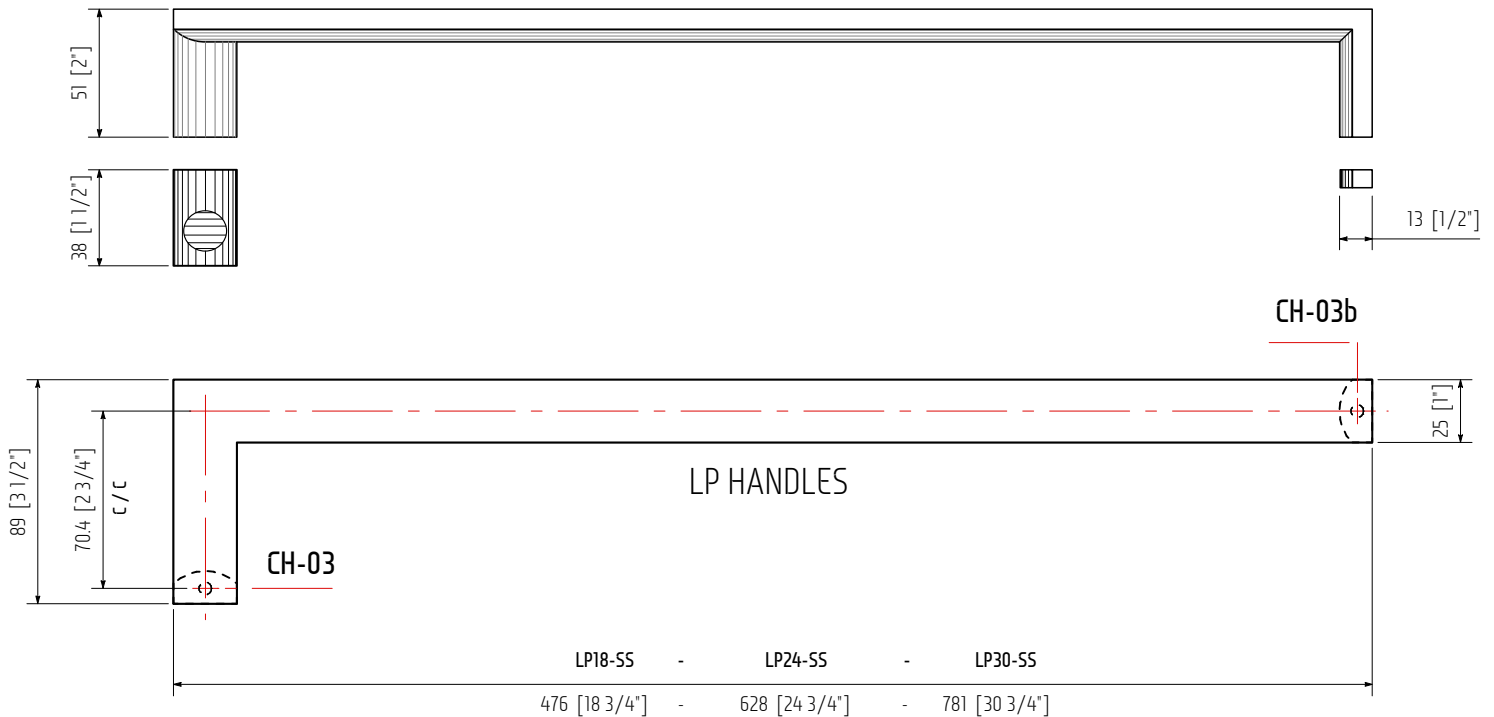

PRODUCT IMAGE: JP18-SS IN BRUSHED STAINLESS STEEL FINISH [BSS]

QUANTITY:	PRODUCT CODE:	FINISH:
	JP18-HP	
	LP18-HP	
	JP24-HP	
	LP24-HP	
	JP30-HP	
	LP30-HP	

KIT INCLUDES: • J/L SERIES - HANDLE • P - PULL
• C 701 - CAP • CH 03 - CONNECTION HARDWARE
• CH 03b - CONNECTION HARDWARE

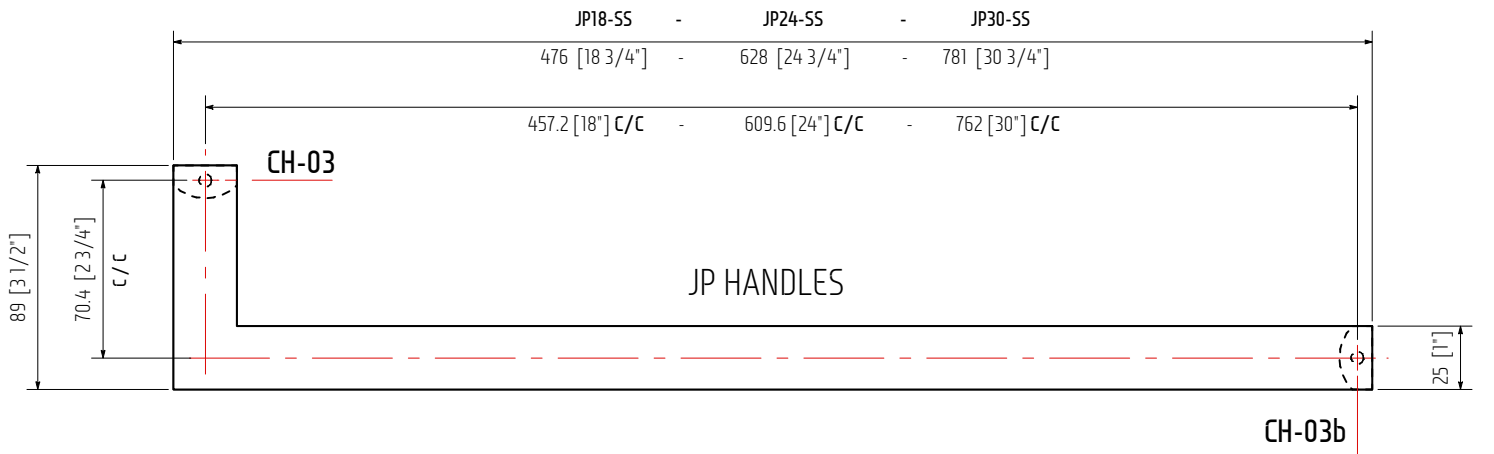

JWL

Contact: info@jwlhome.com

PRODUCT DETAILS:

- Hand crafted from solid 304 stainless steel.
- Curved underside for comfort grip.
- Solid door connection hardware included.
- For more details visit: www.jwlhome.com


POLISHED STAINLESS [PSS]

MATTE BLACK [BBL]

SATIN BRASS PVD [SBZ]

SATIN WHITE [SWH]

BRUSHED STAINLESS [BSS]



Product sizes can vary $\pm 0.5\%$. Dimensions and specifications are subject to change without notice



STANDARD
INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-03

CONNECTION HARDWARE INSTALLATION



Ø 10mm [3/8"] HOLE

GLASS DOOR

1 6—STANDARD GASKET 10 9 STANDARD GASKET 6 4 3 5 2

7—OPTIONAL METAL BACKPLATE 8—OPTIONAL GASKET 11 7—OPTIONAL METAL BACKPLATE

10 FOR 6mm [1/4"] - 10mm [3/8"] THICK GLASS WITH STANDARD BACKPLATE

THREADED ROD 36mm [1 7/16"]

11 FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE 12mm [1/2"] - 19mm [3/4"] THICK GLASS

THREADED ROD 56mm [2 3/16"]

ALLEN KEY TOOL

1 JWL - 'a' HANDLE - NO SET SCREWS - VARIED LENGTHS AND FINISHES

2 JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES

3 HANDLE SET SCREW - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

4 BRASS COLLAR - 7mm or 1/4" WRENCH

5 STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE

6 STANDARD BLACK RUBBER GASKET x 2

7 OPTIONAL METAL BACKPLATE x 2

8 OPTIONAL BLACK RUBBER GASKET x 2

9 CLEAR PVC INSERT TO COVER THREADED ROD

10 M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

11 M5 ROD - 56mm [2 3/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

Contact: info@jwlhome.com

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com



NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 10mm [3/8"] DIA.

STANDARD
BACKPLATE INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-03b

CONNECTION HARDWARE INSTALLATION

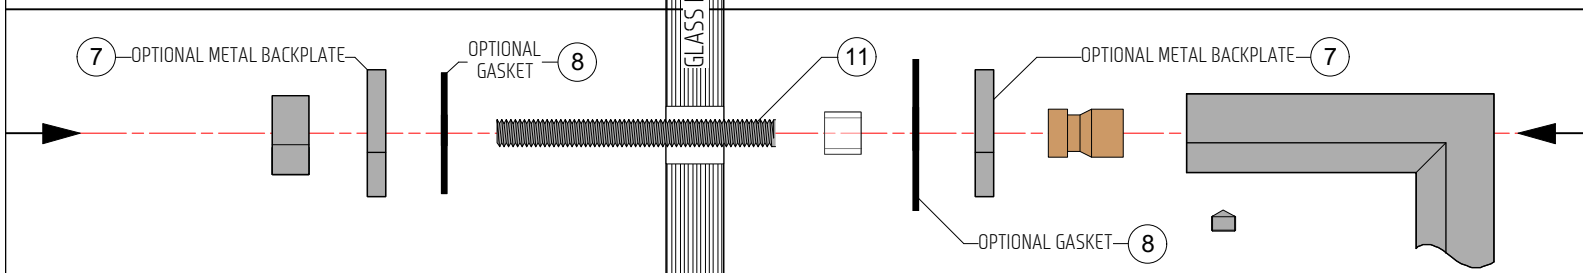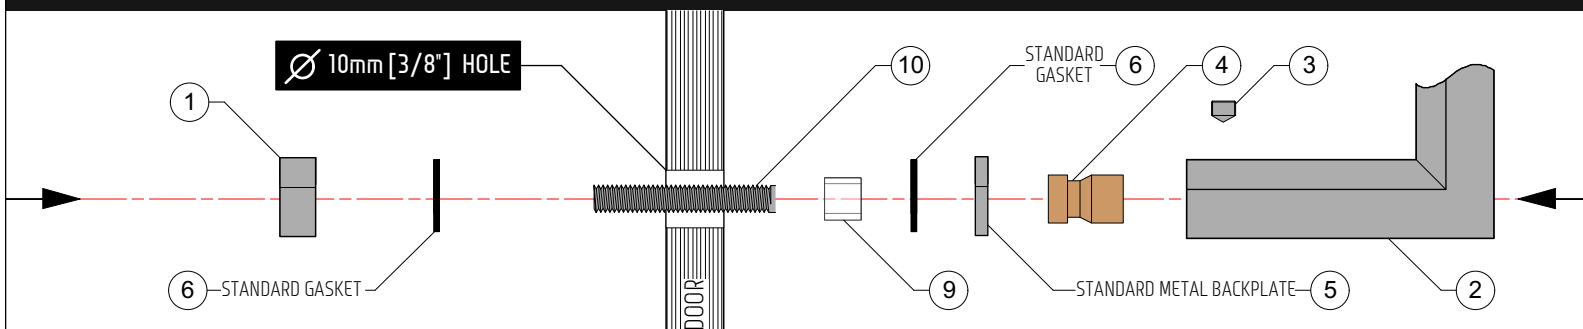

10— FOR 6mm [1/4"] THICK GLASS

THREADED ROD 31mm [1 1/4"]

11— FOR 10mm [3/8"] THICK GLASS
WITH STANDARD BACKPLATE

THREADED ROD 36mm [1 7/16"]

12— FOR 10mm [3/8"] WITH OPTIONAL BACKPLATE
12mm [1/2"] - 19mm [3/4"] THICK GLASS

THREADED ROD 46mm [1 3/4"]

ALLEN KEY TOOL

1		JWL - 'a' CAP - NO SET SCREW - ALIGN PROFILE WITH HANDLE
2		JWL - 'b' HANDLE - WITH SET SCREWS - VARIED LENGTHS AND FINISHES
3		HANDLE SET SCREW - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
4		BRASS COLLAR - 7mm or 1/4" WRENCH - TIGHTEN AT BASE
5		STANDARD METAL BACKPLATE - COLOUR MATCHED TO HANDLE
6		STANDARD BLACK RUBBER GASKET x 2
7		OPTIONAL METAL BACKPLATE - COLOUR MATCHED TO HANDLE x 2
8		OPTIONAL BLACK RUBBER GASKET x 2
9		CLEAR PVC INSERT TO COVER THREADED ROD
10		M5 ROD - 31mm [1 1/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
11		M5 ROD - 36mm [1 7/16"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED
12		M5 ROD - 46mm [1 3/4"] - TIGHTEN WITH ALLEN KEY TOOL - PROVIDED

JWL

Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Standard gasket and backplate not req. with optional backplate.
- Allen Key tool for set screw installation included.
- Hardware included for glass 6mm [1/4"] to 19mm [3/4"] thick.
- For more details visit: www.jwlhome.com

NOTE: DO NOT COUNTER SINK GLASS HOLES - OPTIONAL BACKPLATE REQ. FOR HOLE SIZES OVER 12mm [1/2"] DIA.