

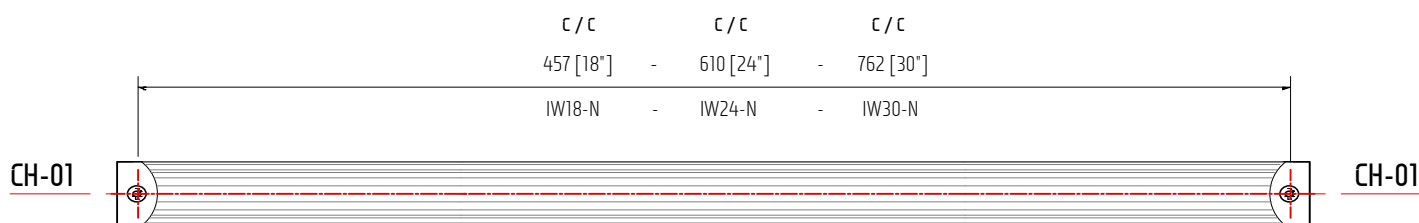


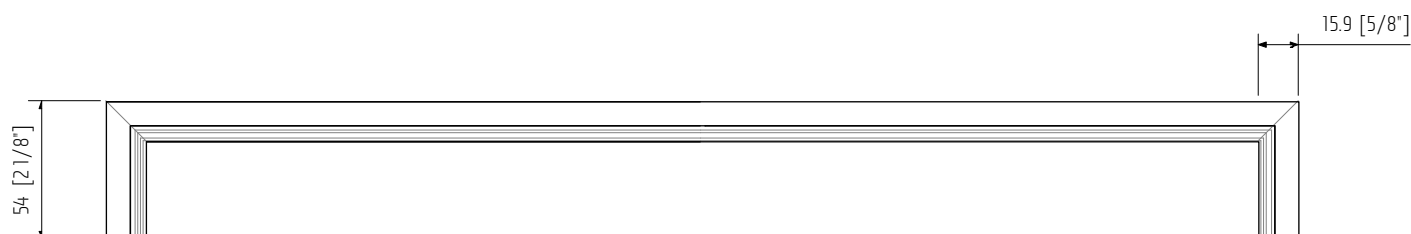

QUANTITY:	PRODUCT CODE:	HANDLE FINISH:
	IW18-W	
	IW24-W	
	IW30-W	

KIT INCLUDES: • IW-W SERIES - HANDLE
• CH 01 - CONNECTION HARDWARE

NOTE: HANDLES ARE SOLID OAK AND WALNUT.
VARIATIONS BETWEEN HANDLE GRAIN AND COLOUR IS UP TO MOTHER NATURE.

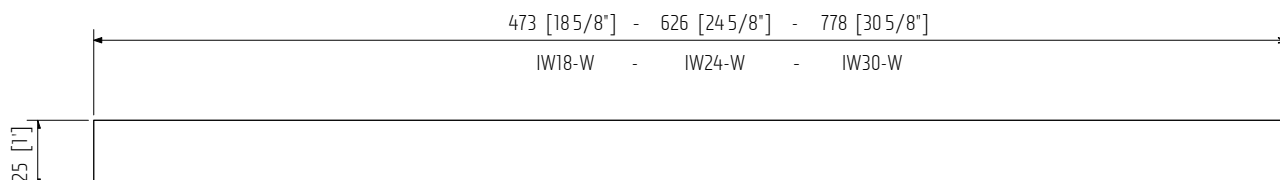

JWL

Contact: info@jwlhome.com

PRODUCT DETAILS:

- Hand crafted from solid American wood.
- Curved underside for comfort grip.
- Solid door connection hardware included.
- For more details visit: www.jwlhome.com

UNCOATED WHITE OAK

UNCOATED WALNUT

COATED BLACK OAK

COATED WHITE OAK

COATED WALNUT



Product sizes can vary $\pm 0.5\%$. Dimensions and specifications are subject to change without notice




STANDARD
INSTALLATION

OPTIONAL
BACKPLATE INSTALLATION

CH-01

CONNECTION HARDWARE INSTALLATION

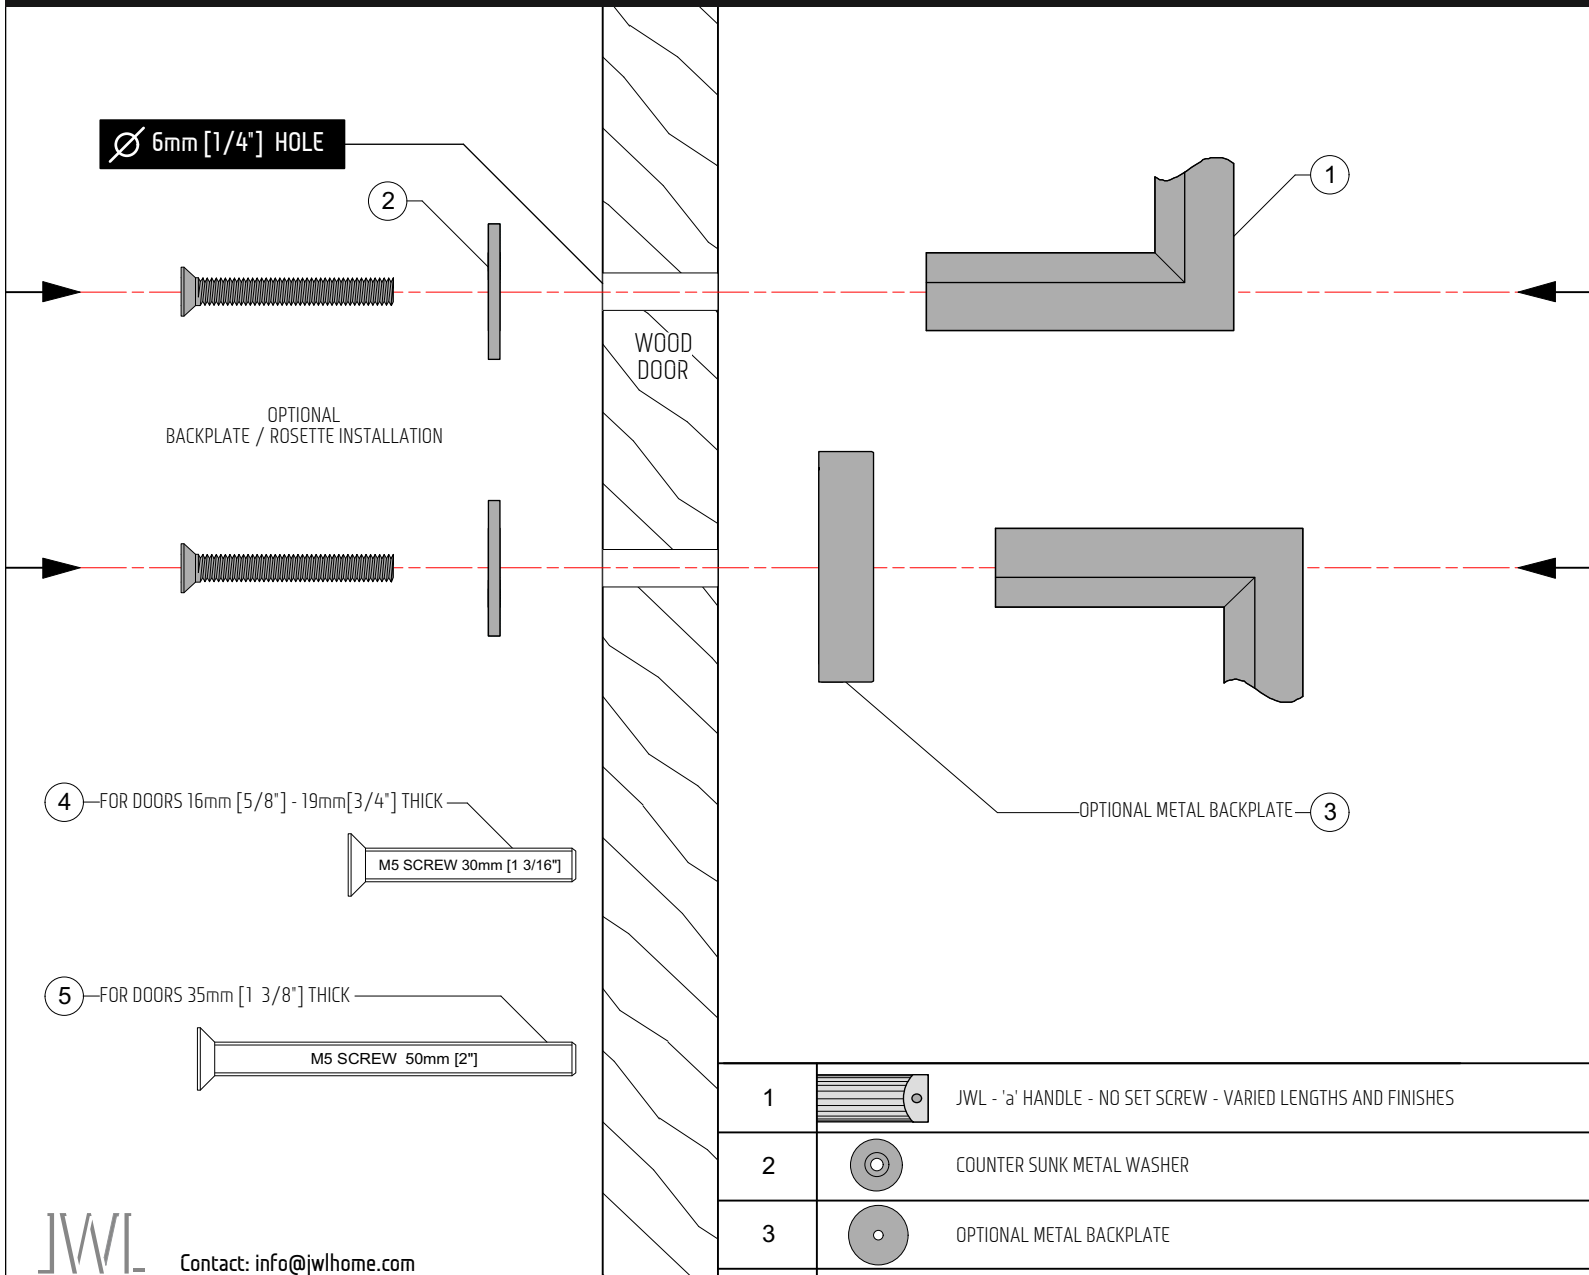

1		JWL - 'a' HANDLE - NO SET SCREW - VARIED LENGTHS AND FINISHES
2		COUNTER SUNK METAL WASHER
3		OPTIONAL METAL BACKPLATE
4		M5 SCREW - 30mm [1 3/16"] - TIGHTEN WITH PHILIPS SCREWDRIVER
5		M5 SCREW - 50mm [2"] - TIGHTEN WITH PHILIPS SCREWDRIVER

JWL

Contact: info@jwlhome.com

PULL
LIFE
OPEN

INSTALLATION DETAILS:

- Hardware included for wood doors 16mm [5/8"] to 35mm [1 3/8"] thick.
- Longer screws available upon request.
- For more details visit: www.jwlhome.com

NOTE: HAND TIGHTEN HANDLE SCREWS WITH A SCREW DRIVER TO AVOID CROSS THREADING OR STRIPPING.

CARE AND MAINTENANCE



With normal wear and tear over the years, the finish may need a re-coat. Touching up a handle or reapplying a finished top coat is a simple process. JWL uses a high performance water based polyurethane finish from General Finishes.

Surface Prep:

1. Scuff clean with a non-woven abrasive pad & 50:50 denatured alcohol & water. 2. Dry 1-2 hours. 3. Sand lightly with a 220-320 grit sanding sponge. 4. Remove dust.

Application:

Apply a liberal amount using a synthetic bristle or foam brush, pad applicator or roller with smooth, even strokes & light lap lines. Avoid heavy pressure & back brushing. Lap lines will tighten down as they dry. Dry time is 2+ hours between coats. One coat for general touchup's and 2 to 3 coats for a complete refinish from bare wood.

JWL wood handles are engineered strong having solid stainless steel corner supports. Like all natural solid wood products a slight darkening of the wood will occur from UV exposure. This is a natural process. Each handle is unique and shows a natural variation in grain texture and colour. Our black handles are consistently black.



General Care:

Use a soft sponge with warm soapy water to clean. Dry off any pooling water on inside corners. Avoid hard abrasives or cleaners.



generalfinishes.com